




# Technical Data Sheet

PN# 260151022110

## Conductive Sewing Thread Size 40

**Purpose:** Conductive sewing thread for making conductive paths in garments and textiles, for making ESD products, medical and EMI shielding . Lightweight thread typically used for sewing garments. It is stronger than comparable polyester and cotton threads.

- Description: Conductive Sewing Thread Silver plated Nylon 66 yarn 22 dtex + 3ply of 110 dtex PET total Size 40
- Lineal Resistance: <math><4000K \Omega / 50cm</math>
- Nominal TEX: 360
- Nominal Denier: 350
- Nominal Diameter: 180 microns
- Yield: 27,692.3 M/Kg
- 
- Standard Packages: (1) 100g cone

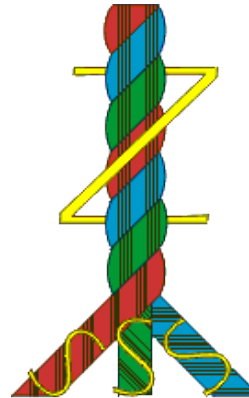

For retail website,  
scan with Smart  
Phone!



*A Family Owned Small Business*

**VTT/Shieldex Trading USA**  
**4502 Rt-31 Palmyra, NY, 14522**

**Phone: 315-597-1674**

**Fax: 315-597-6687**

**Email: [whoge@rochester.rr.com](mailto:whoge@rochester.rr.com)**

**[www.shieldextrading.net](http://www.shieldextrading.net)**

Statex Productions & Vertriebs GmbH  
Kleiner Ort 11 28357 Bremen Germany  
Tel: +49 421 275047/8, Fax: +49 421 273643  
[info@statex.de](mailto:info@statex.de)

  
© 2010 VTT  
Rev 1.20.12